


输入法兰齿轮减速机技术参数 FLANGE TYPE REDUCER WITHOR MOTOR PARAMETERS


■ 卧式 Horizontal ■ 立式 Vertical



■ ZHM 卧式 ZHM Horizontal

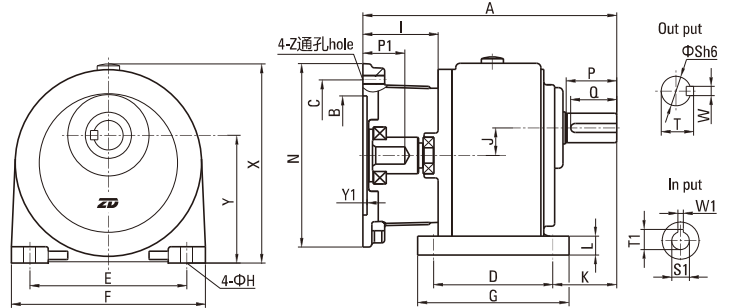

■ ZVM 立式 ZVM Vertical

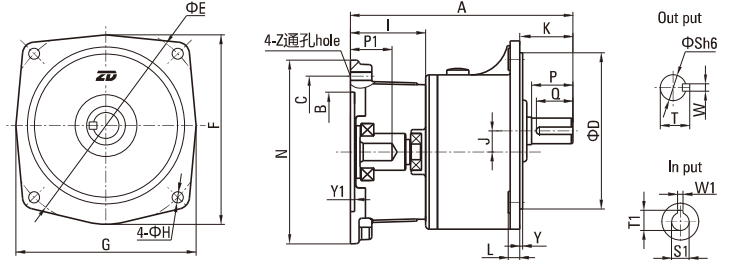

■ 输入孔尺寸 Input Bore Size

功率 Power	输入孔 Input Bore		键槽 Keyway	
	S1	W1	T1	P1
200W	Φ11	4	12.8	32.5
400W	Φ14	5	16.3	32.5
750W	Φ19	6	21.8	43.0
1500W	Φ24	8	27.3	53.0
2200W	Φ28	8	31.3	63.0
3700W	Φ28	8	31.3	63.0

■ 输出轴尺寸 Output Shaft Size

型号 Size	输出轴 Output Shaft		键槽 Keyway			键 Key
	Sh6	P	W	T	Q	SPEC
1#	Φ18	30	5	20.2	27	5*5*27
2#	Φ22	40	7	25.0	35	7*7*35
3#	Φ28	45	7	31.3	40	7*7*40
4#	Φ32	55	10	35.5	50	10*8*50
5#	Φ40	65	10	43.5	60	10*8*60
6#	Φ50	80	14	54.0	75	14*9*75

输入法兰齿轮减速机技术参数 FLANGE TYPE REDUCER WITHOR MOTOR PARAMETERS

卧式输入法兰 Horizontal Type

单位Unit:mm

功率 Power	减速比Ratio	型号	A	B	C	D	E	F	G	H	I	J	K	L	N	X	Y	Y1	Z
200W 1/4HP	3-10	1#	160	110	130	40	110	135	65	9	55	16.0	50	10.5	160	138	88.50	4.5	M8
	15-90	2#	195	110	130	65	130	158	90	12	55	17.5	60	13	160	152	97.50	4.5	M8
	100-200	3#	225	110	130	90	140	178	120	12	55	23.0	68	17	160	178	116.0	4.5	M8
400W 1/4HP	3-10	2#	195	110	130	65	130	158	90	12	55	17.5	60	13	160	152	97.50	4.5	M8
	15-90	3#	225	110	130	90	140	178	120	12	55	23.0	68	17	160	178	116.0	4.5	M8
	100-200	4#	255	110	130	130	170	210	165	13	55	30.0	70	18	160	216	138.5	4.5	M8
750W 1/4HP	3-25	3#	250	130	165	90	140	178	120	12	82	23.0	68	17	200	178	116.0	4.5	M10
	3-120	4#	285	130	165	130	170	210	165	13	82	30.0	70	18	200	216	138.5	4.5	M10
	125-200	5#	330	130	165	150	210	265	203	15	82	36.0	83	20	200	250	160.0	4.5	M10
1500W 2HP	3-30	4#	285	130	165	130	170	210	165	13	82	30.0	70	18	200	216	138.5	4.5	M10
	40-100	5#	330	130	165	150	210	265	203	15	82	36.0	83	20	200	250	160.0	4.5	M10
2200W 3HP	3-40	5#	355	180	215	150	210	265	203	15	105	36.0	83	20	250	250	160.0	5.0	M12
	45-100	6#	410	180	215	170	265	335	238	18	105	51.0	97	25	250	308	200.0	5.0	M12
3700W 5HP	3-10	5#	355	180	215	150	210	265	203	15	105	36.0	83	20	250	250	160.0	5.0	M12
	15-60	6#	410	180	215	170	265	335	235	18	105	51.0	97	25	250	308	200.0	5.0	M12

立式输入法兰 Vertical Type

单位Unit:mm

功率 Power	减速比Ratio	型号	A	B	C	D	E	F	G	H	I	J	K	L	N	Y	Y1	Z
200W 1/4HP	3-10	*1#	160	110	130	50	140	120	120	9	55	16	40.0	12	160	6	4.5	M8
	15-90	2#	195	110	130	148	185	175	165	12	55	17.5	48.0	12	160	3	4.5	M8
	100-200	3#	225	110	130	170	220	205	195	12	55	23	58.0	13	160	3	4.5	M8
400W 1/4HP	3-10	2#	195	110	130	148	185	175	165	12	55	17.5	48.0	12	160	3	4.5	M8
	15-90	3#	225	110	130	170	220	205	195	12	55	23	58.0	13	160	3	4.5	M8
	100-200	4#	255	110	130	185	255	239	216	13	55	30	66.5	16	160	3	4.5	M8
750W 1/4HP	3-25	3#	250	130	165	170	220	205	195	12	82	23	58.0	13	200	3	4.5	M10
	3-120	4#	285	130	165	185	255	239	216	13	82	30	66.5	16	200	3	4.5	M10
	125-200	5#	330	130	165	230	310	278	255	15	82	36	83.0	18	200	5	4.5	M10
1500W 2HP	3-30	4#	285	130	165	185	255	239	216	13	82	30	66.5	16	200	3	4.5	M10
	40-100	5#	330	130	165	230	310	278	255	15	82	36	83.0	18	200	5	4.5	M10
2200W 3HP	3-40	5#	355	180	215	230	310	278	255	15	105	36	83.0	18	250	5	5.0	M12
	45-100	6#	410	180	215	280	390	369	342	18	105	51	92.0	25	250	5	5.0	M12
3700W 5HP	3-10	5#	355	180	215	230	310	278	255	15	105	36	83.0	18	250	5	5.0	M12
	15-60	6#	410	180	215	280	390	369	342	18	105	51	92.0	25	250	5	5.0	M12

※备注：1.配合IEC电机为主
2.*属于B型输出法兰

※Note: 1.Available for IEC motor.
2.Belong to type output flange.