

400W尺寸图与性能表

400W DIMENSIONAL DRAWING & PERFORMANCE TABLE

性能表 Performance Table (输入转速为3,000rpm时 When input speed is 3000rpm)

额定输入 马达功率 Rated Input Motor	减速比 Reduction Ratio	系列号 Model			输出轴 转速 Shaft Speed (rpm)	额定输出 扭矩 Standard Output Torque (N.m)	瞬间最大 输出扭矩 Instantaneous Max. Output Torque (N.m)	容许径向 负荷 Permissible Radial Load (N)	容许轴向 负荷 Permissible Axial Load (N)	输入轴换算 内部惯性力矩 Internal Moment Of inertia Of Input Shaft Conversion ($\times 10^{-4}$ kg.m ²)	容许输出 扭矩 Permissible Output Torque (N.m)	瞬间最大容 许输出扭矩 Instantaneous Max. Permissible Output Torque (N.m)	
		机座号 Type No.	系列号 Model	减速比 Reduction Ratio									马达功率 Motor
400W	1/3	52	ZDR	3	400	1000	3.43	10.3	392	196	0.145	3.43	10.3
	1/5	78	ZDR	5	400	600	5.39	16.2	980	490	0.363	6.57	19.7
	1/9	78	ZDR	9	400	333	9.51	28.5	1180	588	0.275	9.70	29.2
	1/15	78	ZDR	15	400	200	15.8	47.5	1470	735	0.300	16.2	48.6
	1/20	78	ZDR	20	400	150	21.1	63.3	1570	785	0.294	21.1	63.3
	1/25	78	ZDR	25	400	120	26.4	79.2	1670	833	0.288	26.4	79.2
	1/35	98	ZDR	35	400	85	37.0	111	2060	1030	0.269	37.0	111
	1/45	125	ZDR	45	400	66	47.5	142.5	3520	1760	0.245	57	171

注1) 安装基准系列(马达适用表记载系列)以外的马达时, 每次都是与我们联系。(法兰尺寸可能不同)

注2) 输入轴换算惯性力矩仅为减速机的数值, 不包括马达的惯性力矩。

注3) 最高输入转速为5000rpm。正常情况下请转速控制在3000rpm以下。

注4) 容许径向负荷表示输出轴中央部位的值。

注5) 全部为斜齿轮适用范围。

注6) 马达的安装顺序请参考P31。

注7) 输出轴旋转方向与马达输入旋转方向相同。

Note1) In case of attachment to a motor beyond the standard models(motor matching series), contact us.(How to measure dimensions of the flange may be changed in some cases.)

Note2) The moment of inertia of input shaft conversion is only gained from the reducer, so it does not include moment of inertia of the motor.

Note3) The max. input speed is 5000rpm, and usually set to 3000rpm or less.

Note4) The permissible radial load is indicated on the center of the output shaft.


Note5) All values are within the range corresponding to helical gear.

Note6) For motor assembly procedure, see 31 page.

Note7) Rotation of the output shaft is in the same direction as motor.

尺寸表 Dimensional Table

● 52ZDR3-400

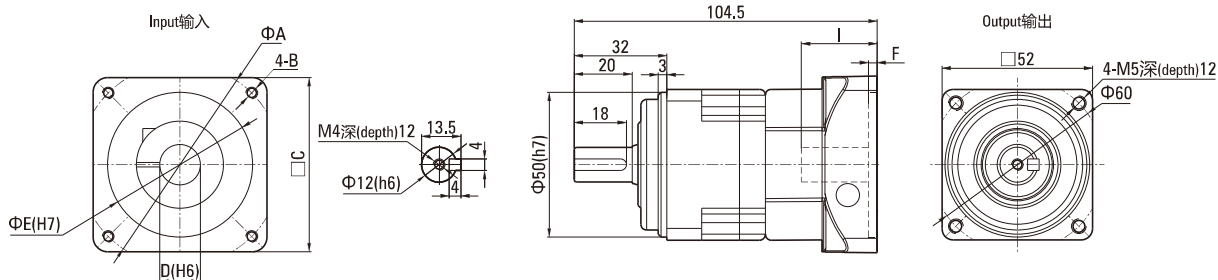


● 法兰部位详细尺寸表 Detailed Flange Dimensions Table

(单位Unit:mm)

马达种类 Motor Type	A	B	C	D	E	F	I
T1	70	M4深(depth)10	60	14	50	4	30
T2	70	M5深(depth)10	60	14	50	4	30
T3	70	M5深(depth)10	60	14	50	4	30

- 概略重量0.71kg
Rough weight 0.71kg
- T1~3的详细情况请参考P.43
For details of T1~3, see 43 page

● 78ZDR5-9-400

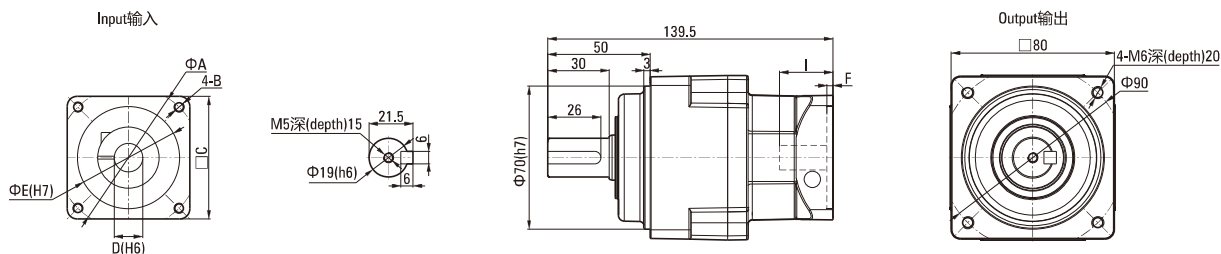

● 法兰部位详细尺寸表 Detailed Flange Dimensions Table

(单位Unit:mm)

马达种类 Motor Type	A	B	C	D	E	F	I
T1	70	M4深(depth)10	60	14	50	4	30
T2	70	M5深(depth)10	60	14	50	4	30
T3	70	M5深(depth)10	60	14	50	4	30


- 概略重量1.7kg
Rough weight 1.7kg
- T1~3的详细情况请参考P.43
For details of T1~3, see 43 page

400W尺寸图与性能表

400W DIMENSIONAL DRAWING & PERFORMANCE TABLE

尺寸表 Dimensional Table

● 78ZDR15-20-25-400

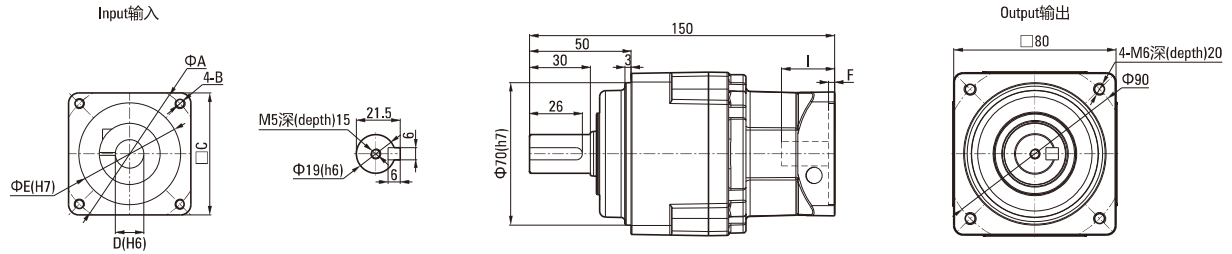


● 法兰部位详细尺寸表 Detailed Flange Dimensions Table (单位Unit:mm)

马达种类 Motor Type	A	B	C	D	E	F	I
T1	70	M4深(depth)10	60	14	50	4	30
T2	70	M5深(depth)10	60	14	50	4	30
T3	70	M5深(depth)10	60	14	50	4	30

- 概略重量2.1kg
Rough weight 2.1kg
- T1~3的详细情况请参照P.43
For details of T1~3, see 43 page

● 98ZDR35-400

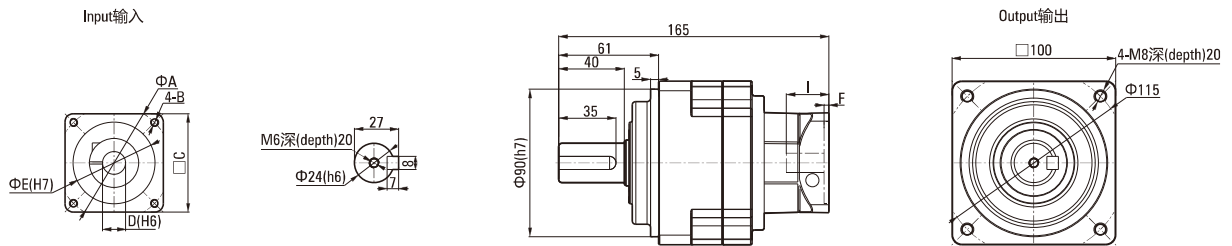


● 法兰部位详细尺寸表 Detailed Flange Dimensions Table (单位Unit:mm)

马达种类 Motor Type	A	B	C	D	E	F	I
T1	70	M4深(depth)10	60	14	50	4	30
T2	70	M5深(depth)10	60	14	50	4	30
T3	70	M5深(depth)10	60	14	50	4	30

- 概略重量3.2kg
Rough weight 3.2kg
- T1~3的详细情况请参照P.43
For details of T1~3, see 43 page

● 125ZDR45-400

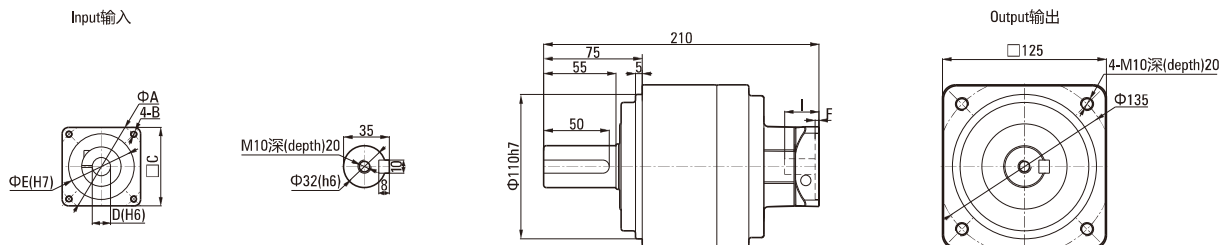

● 法兰部位详细尺寸表 Detailed Flange Dimensions Table (单位Unit:mm)

马达种类 Motor Type	A	B	C	D	E	F	I
T1	70	M4深(depth)10	60	14	50	4	30
T2	70	M5深(depth)10	60	14	50	4	30
T3	70	M5深(depth)10	60	14	50	4	30

- 概略重量7.2kg
Rough weight 7.2kg
- T1~3的详细情况请参照P.43
For details of T1~3, see 43 page